


| LTR | DESCRIPTION | DATE | BY |
|-----|-------------|----------|-----|
| - | Released | 12/17/02 | JCL |
| | | | |

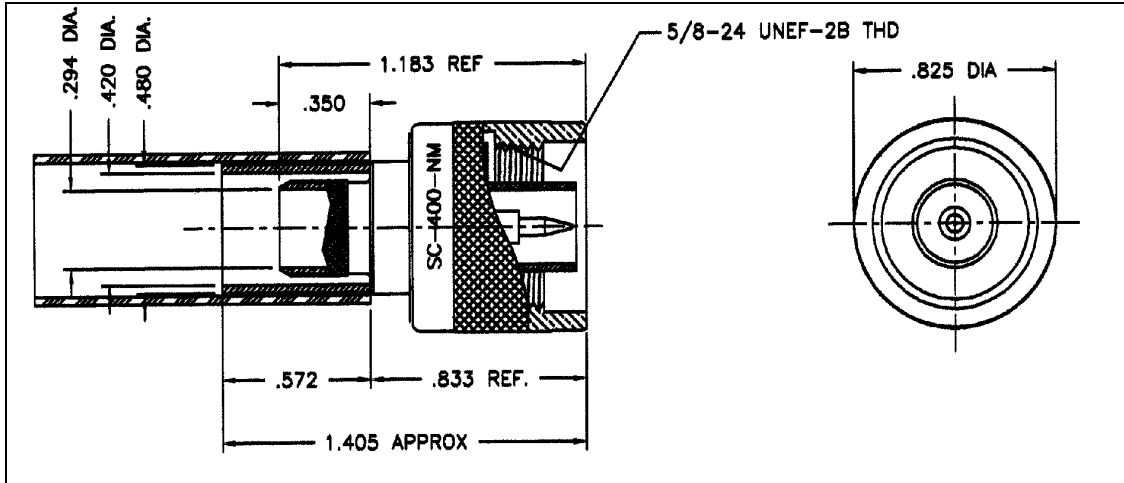

I. MATERIALS & FINISHES

- center contact: Gold Plated Brass
- outer contact: Nickel Plated Brass
- body: Nickel Plated Brass
- coupling nut: Nickel Plated Brass (knurled)
- crimp sleeve: Nickel Plated Copper
- dielectric: Teflon® PTFE
- gasket: Silicone Rubber
- shrink sleeve: Adhesive Lined Polyolefin
- attachment: braid crimp (.429" hex)

II. ELECTRICAL PROPERTIES

- impedance: 50 ohms
- working voltage: 1000 vrms (max)
- vswr: 1.25:1 (max) up to 2.5 GHz
- insertion loss: 0.10 x \sqrt{F} ghz

Unless otherwise specified, dimensions are in inches. Tolerances are applicable when specified.

These drawings and specifications contain proprietary information which is the property of Times Microwave Systems.

| Approvals | | |
|-----------|-----|----------|
| Drawn | JCL | 12/17/02 |
| | | |
| | | |
| | | |



TIMES MICROWAVE SYSTEMS

Wallingford, CT 06492
 (203) 949-8400; (203) 949-8423.Fax
 www.timesmicrowave.com

SC-400-NM

Type N Male (Plug)
 for LMR-400 Cable

| | | |
|-----------|---------------------------|----------------------------------|
| Size A | CAGE CODE 68999 | Drawing No.: 3190-1454 |
| Scale: NA | Rev. (-) | Sheet: 1 of 1 |